

ADVANTAGES AT A
GLANCE:


The adhesive tape for outdoor use!

- * Highly effective adhesive
- Easy and quick installation
- * Extreme adhesion
- Excellent price/performance

Product description:


Acrylic adhesive tape for waterproofing against water, wind and noise, which has been reinforced for years. Tested according to DIN 4108-11.

Properties:



Product data sheet		
Dispersion adhesive		polyacrylate-based
Support system		LDPE film 70 µm
Reinforcing fabric		Yes
Protective cover		Yes
Solvents and plasticizers		NO
Thickness	DIN EN 1942	0,25/0,27 mm
Sd value		approx. 24 m
Breaking load with elongation at break	DIN EN 14410	≥25 N/25 mm; 100%
Condensation water resistance		high
Aging resistance		particularly high
Initial adhesion (tack)		high
Application temperature		+5°C recommended (processable from -10°C)
Temperature resistance		-30°C / +100°C
Storage location		dry and covered, UV-protected
Storage time		max. 12 months
Storage temperature		+18°C / +25°C

Synerw GmbH does not assume any liability if the product is not used as prescribed.

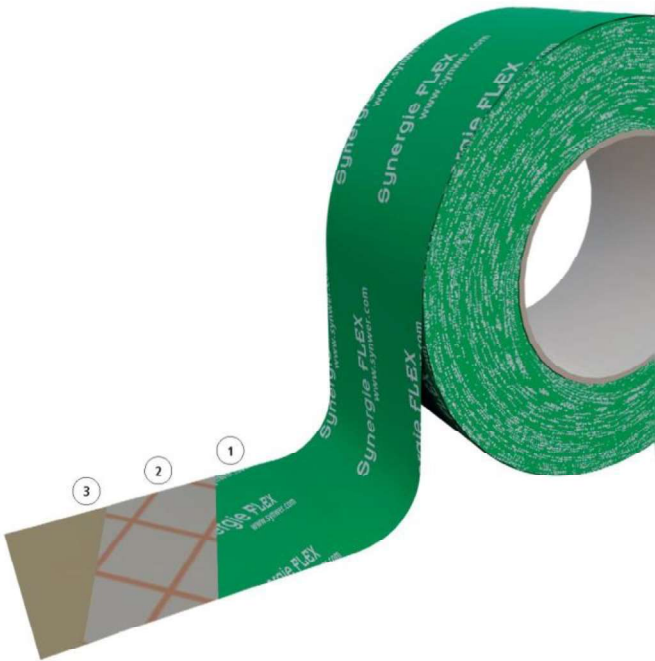

Composition:

- Heat-resistant polyethylene ①
- Acrylic adhesive reinforced with scrims ②
- Silicone-coated paper ③

Articles and units				
Article	Width (mm)	Length (m)	Packing unit pcs	Pallet (Packing)
1164.11987	60	25	10	60