

Synergy Connection adhesive AK


ADVANTAGES AT A GLANCE:

The permanent elastic connection bonding!

- Suitable for indoor and outdoor use
- Bonding even on damp Underground
- Safe and simple bonding
- Adheres to most of the grounds

Product description:

The liquid adhesive was specially developed to carry out all gluing and sealing work with Head underlays and Syn DB.

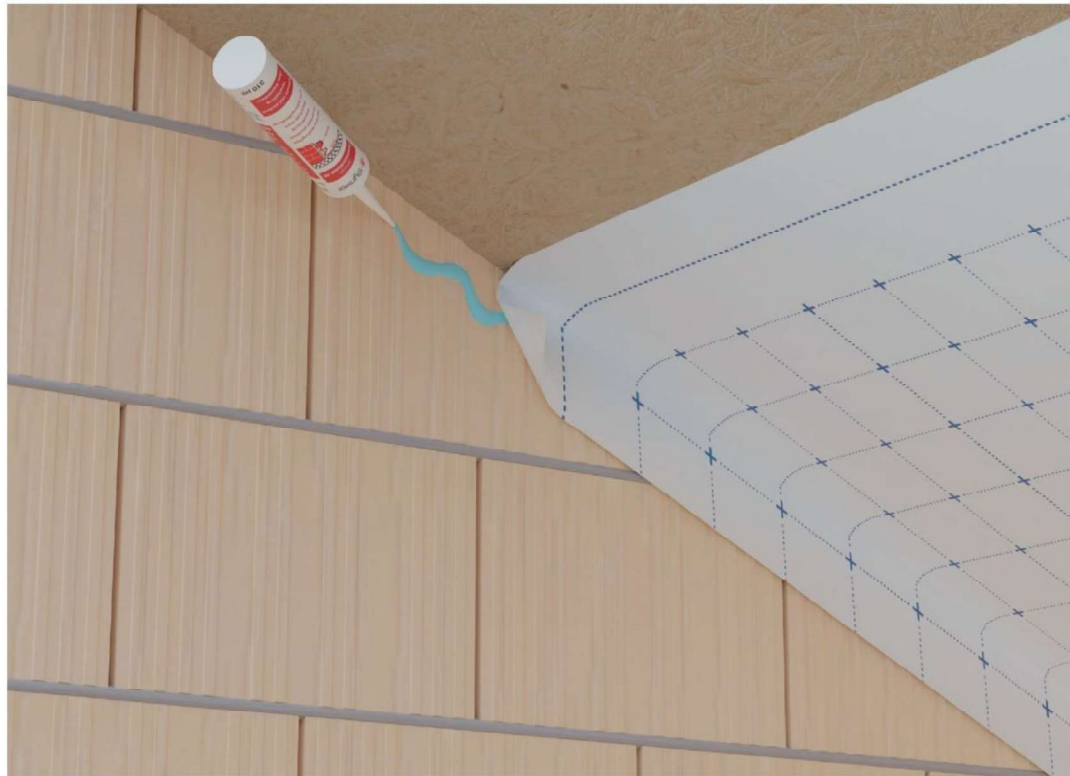

Articles and units

Article	Content (ml)	Delivery form	Packing unit (pcs.)	Pallet (Packing)
1179.0	310	Kartusche	20	60
1652.0	600	Schlauchbeutel	12	45

Properties:



Product data sheet

Adhesive		polyacrylate-based
Emissions	Emicode®	very low emission
Density (at 20°C)	EN 542	approx. 1,4 g/cm³
Viscosity (at 20°C)		Medium viscosity paste
Application quantity (Ø 5 mm)		approx. 16 m
Application temperature		from +5°C
Temperature resistance		-30°C / +60°C
Storage location		dry and covered, UV-protected
Storage time		max. 12 months
Storage temperature		+15°C / +25°C

Synwer GmbH does not assume any liability if the product is not used as prescribed.